

DAIHATSU
ROCKY

SUPPLEMENT D
CONVERSION TABLE

- 1. METRIC-ENGLISH CONVERSION
TABLE D-2
- 2. DECIMAL AND METRIC
EQUIVALENTS D-3

WRU90-D001



CONVENRSION TABLE


1. METRIC-ENGLISH CONVERSION TABLE

Multiply	by	to get equivalent number of:
LENGTH		
Inch	25.4	millimetres (mm)
Foot	0.304 8	metres (m)
Yard	0.914 4	metres
Mile	1.609 3	kilometres (km)
AREA		
Inch ²	645.2	millimetres ² (mm ²)
	6.45	centimetres ² (cm ²)
Foot ²	0.092 9	metres ² (m ²)
Yard ²	0.836 1	metres ²
VOLUME		
Inch ³	16 387.	mm ³
	16.387 2	cm ³
	0.016 4	litres (l)
Quart	0.946 4	litres
Gallon	3.785 4	litres
Yard ³	0.764 6	metres ³ (m ³)
MASS		
Pound	0.453 6	kilograms (kg)
Ton	907.18	kilograms
Ton	0.907	tonne (t)
FORCE		
Kilogram	9.807	newtons (N)
Ounce	0.278 0	newtons
Pound	4.448	newtons
TEMPERATURE		
Degree Fahrenheit	(°F-32) ÷ 1.8	degree Celsius
TORQUE		
Pound-inch	0.112 98	newton-metres (N-m)
Pound-foot	1.355 8	newton-metres
POWER		
Horsepower	0.746	kilowatts (kW)
PRESSURE OR STRESS		
Inches of water	0.249 1	kilopascals (kPa)
Pounds/sq. in.	6.895	kilopascals
ENERGY OR WORK		
BTU	1 055.	joules (J)
Foot-pound	1.355 8	joules
Kilowatt-hour	3 600 000.	joules
	or 3.6 × 10 ⁶	

2. DECIMAL AND METRIC EQUIVALENTS

Fractions	Decimal In.	Metric mm.	Fractions	Decimal In.	Metric mm.
1/64	.015625	.397	33/64	.515625	13.097
1/32	.03125	.794	17/32	.53125	13.494
3/64	.046875	1.191	35/64	.546875	13.891
1/16	.0625	1.588	9/16	.5625	14.288
5/64	.078125	1.984	36/64	.578125	14.684
3/32	.09375	2.381	19/32	.59375	15.081
7/64	.109375	2.778	39/64	.609375	15.478
1/8	.125	3.175	5/8	.625	15.875
9/64	.140625	3.572	41/64	.640625	16.272
5/32	.15625	3.969	21/32	.65625	16.669
11/64	.171875	4.366	43/64	.671875	17.066
3/16	.1875	4.763	11/16	.6875	17.463
13/64	.203125	5.159	45/64	.703125	17.859
7/32	.21875	5.556	23/32	.71875	18.256
15/64	.234375	5.953	47/64	.734375	18.653
1/4	.250	6.35	3/4	.750	19.05
17/64	.265625	6.747	49/64	.765625	19.447
9/32	.28125	7.144	25/32	.78125	19.844
19/64	.296875	7.54	51/64	.796875	20.241
5/16	.3125	7.938	13/16	.8125	20.638
21/64	.328125	8.334	53/64	.828125	21.034
11/32	.34375	8.731	27/32	.84375	21.431
23/64	.359375	9.128	55/64	.859375	21.828
3/8	.375	9.525	7/8	.875	22.225
25/64	.390625	9.922	57/64	.890625	22.622
13/32	.40625	10.319	29/32	.90625	23.019
27/64	.421875	10.716	59/64	.921875	23.416
7/16	.4375	11.113	15/16	.9375	23.813
29/64	.453125	11.509	61/64	.953125	24.209
15/32	.46875	11.906	31/32	.96875	24.606
31/64	.484375	12.303	63/64	.984375	25.003
1/2	.500	12.7	1	1.00	25.4

WRU90-D003

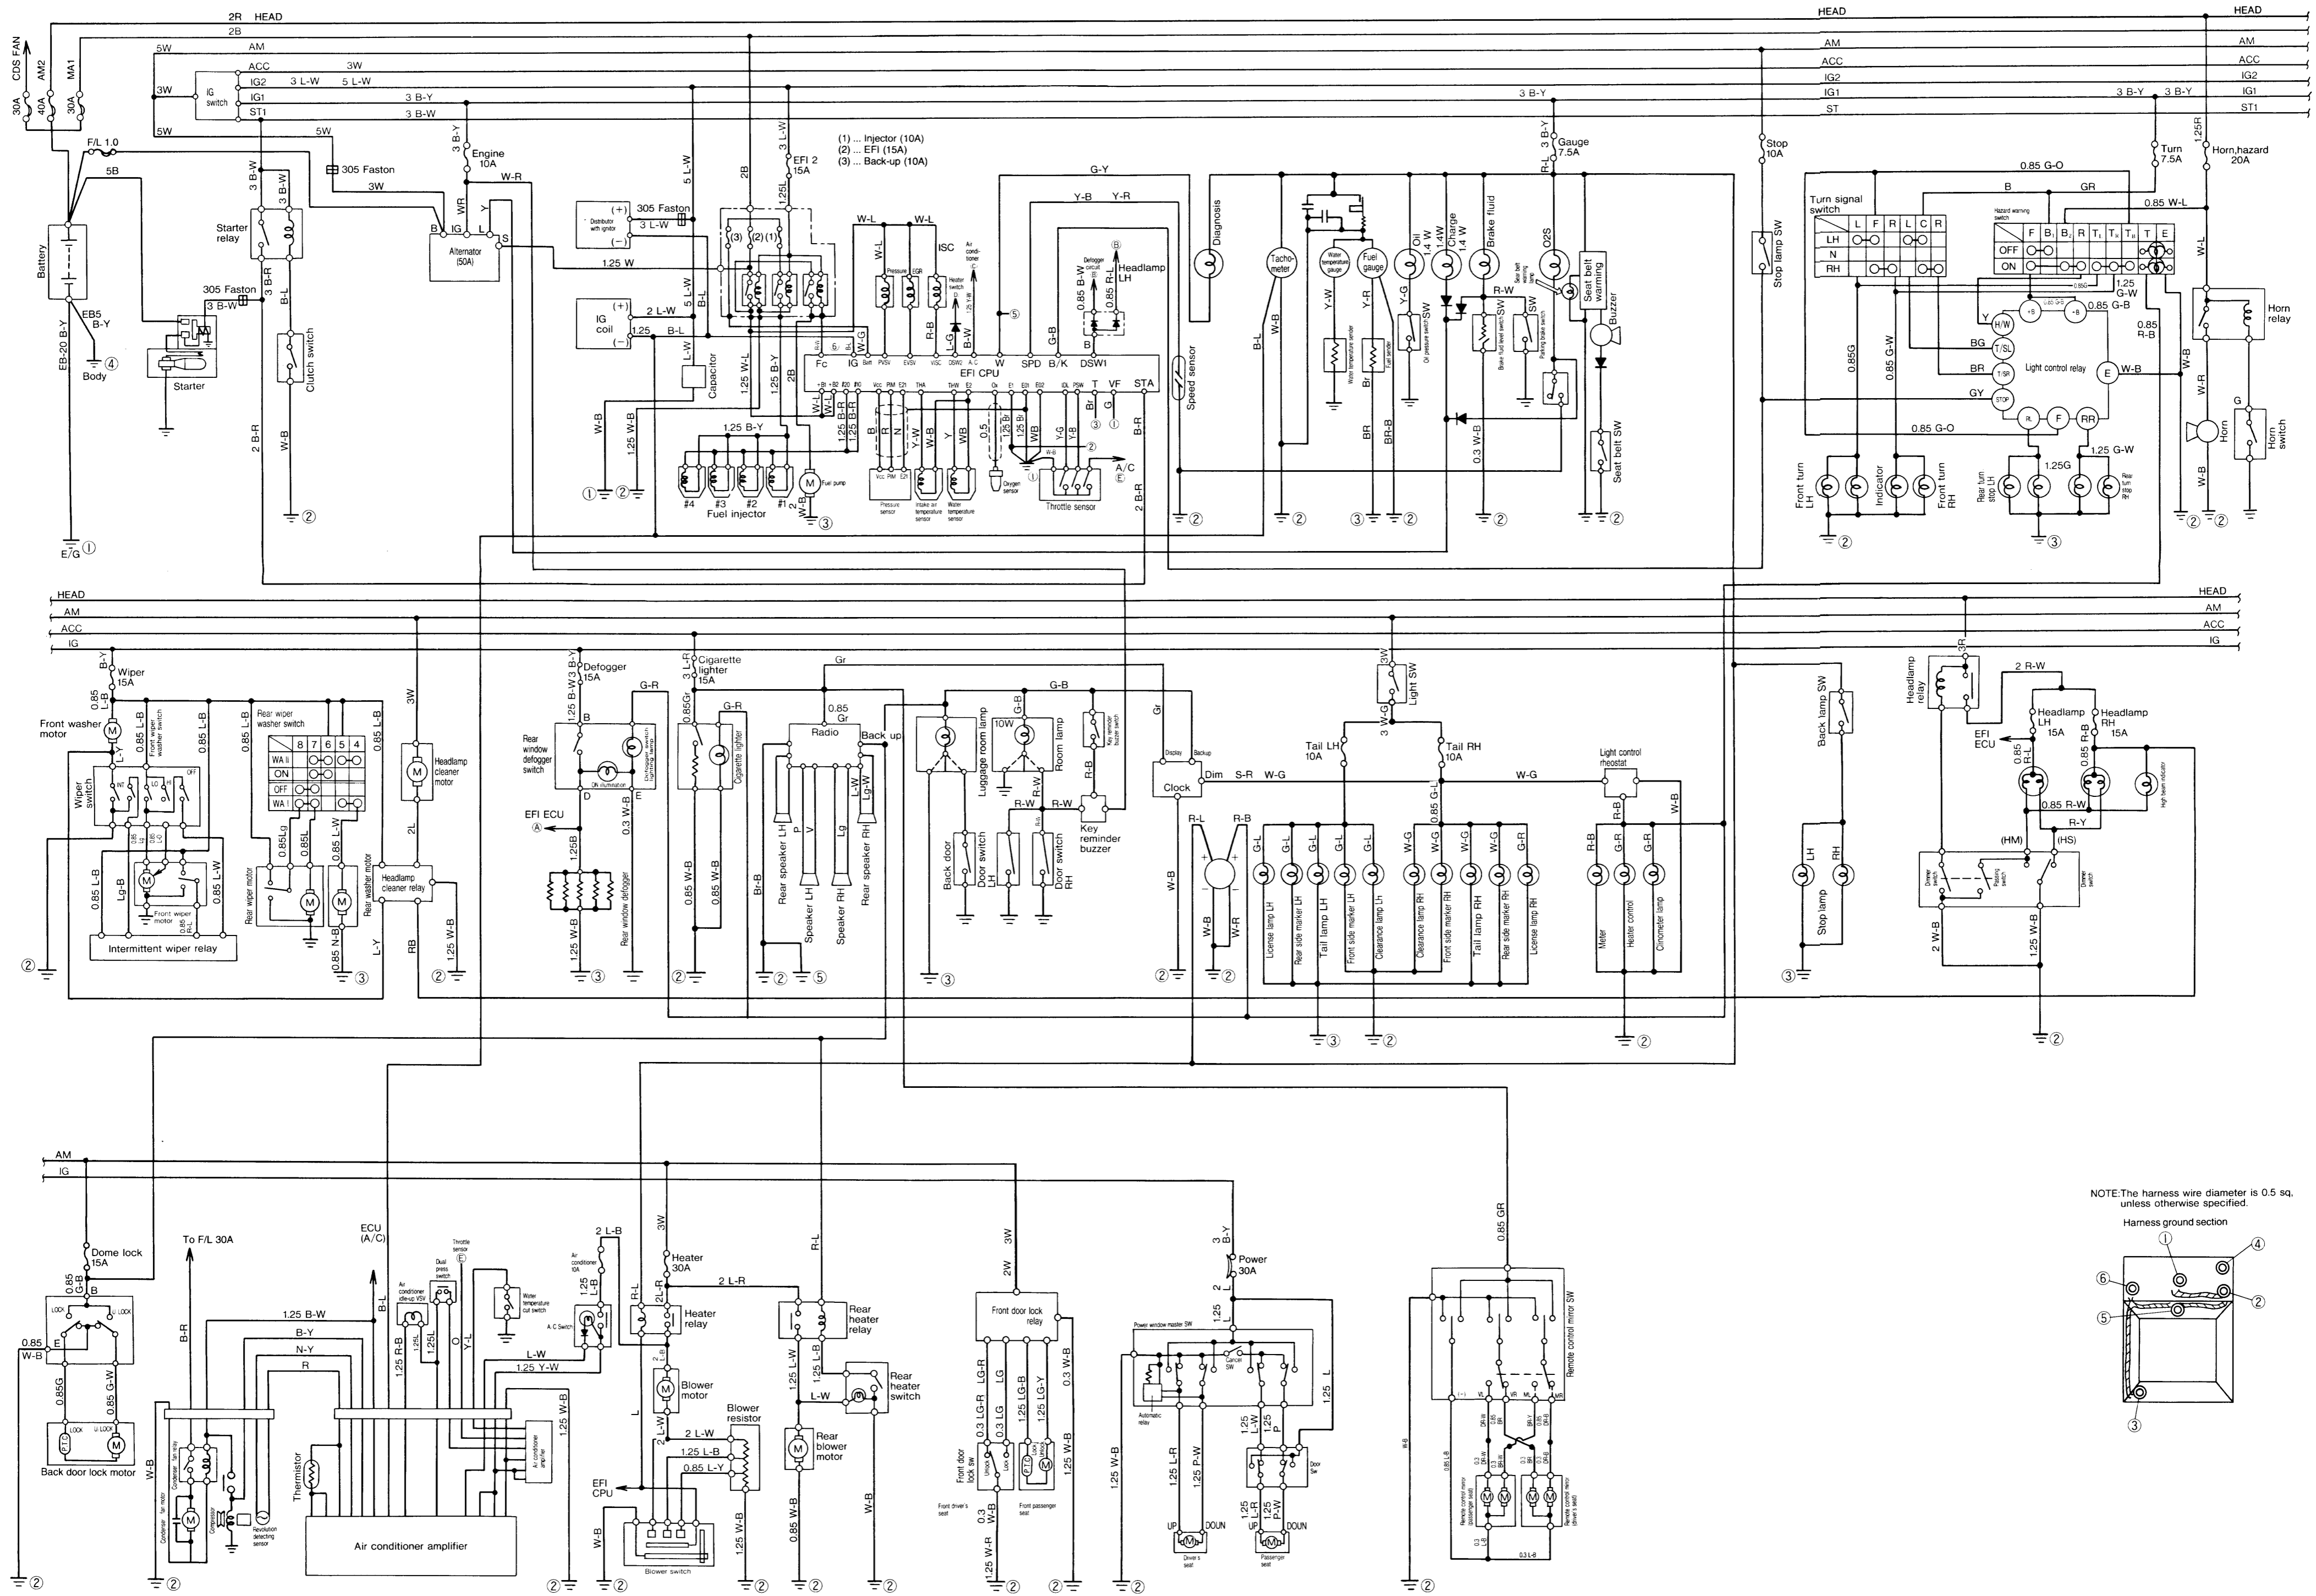

NOTE: The harness wire diameter is 0.5 sq. unless otherwise specified.

Harness ground section

